


Gelenklager GE GE200ES-IKO - GE200ES-IKO

<https://www.123kugellager.de/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/ge200es-iko>

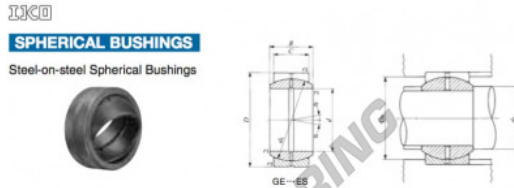

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm					Permissible tilting angle degree			
	Without seals	With seals		d	D	B	C	d_s	r_1 (1)	r_2 (1)	α	α_1
200	GE 200ES		26,1	200	290	130	100	250	1,1	1,1	7	6
Mounting dimensions mm			Dynamic load capacity C_d N	Static load capacity C_s N								
d_s	D_s	d_s										
Min.	Max.(2)	Min.										
207	213,5	283	244	2 450 000	14 700 000							

Notes(1) Minimum allowable value of chamfer dimensions r_1 and r_2 .
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s .
Remark1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952392073
Innendurchmesser	200 mm
Außendurchmesser	290 mm
Dicke	130 mm
Typ	GE
Schmierung	ohne
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE