


Gelenklager GE

SBB56-2RS-IKO - SBB56-2RS-IKO

<https://www.123kugellager.de/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/sbb56-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

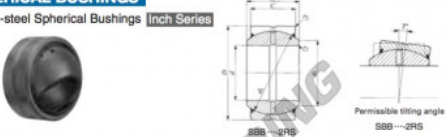

| Shaft dia. mm (inch) | Identification number | | Mass (Ref.) kg | Boundary dimensions mm(inch) | | | |
|--|---------------------------|--|--|---|-----------------|----------------|----------------|
| | Without seal | With seals | | d | D | B | C |
| 88.900 (3 1/2) | | SBB 56-2RS | 4.83 | 88.900 (3 1/2) | 139.700 (5 1/2) | 77.77 (3.062) | 66.68 (2.625) |
| Radial internal clearance mm Min./Max. | Mounting dimensions mm | | Dynamic load capacity C _d N | Static load capacity C _s N | | | |
| | d _k | d ₁ r ₁ max. r ₂ max. | | C _d | C _s | C _s | C _s |
| 128 (5.039) | 0.13 / 0.23 | 101.6 0.6 0.8 | 837 000 | 5 020 000 | | | |

Notes: (1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

| | |
|------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3663952392974 |
| Innendurchmesser | 88.9 mm |
| Außendurchmesser | 139.7 mm |
| Dicke | 77.77 mm |
| Typ | GE |
| Schmierung | ohne |
| Verpackung | 1 |

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE