


Gelenklager GE GE60EC-2RS-IKO - GE60EC-2RS-IKO

<https://www.123kugellager.de/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/ge60ec-2rs-iko>

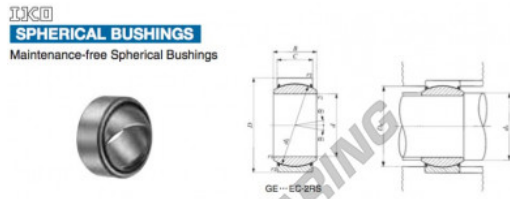

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		d	D	B	C	d _k	r ₁ mm	r ₂ mm	α	α ₁
60	—	GE 60EC-2RS	1,10	60	90	44	36	80	1	1	—	3

Mounting dimensions mm				Dynamic load capacity C _d		Static load capacity C _s	
d _s		D _s		N		N	
Min.	Max. ⁽¹⁾	Max.	Min.				
65.5	66.5	84.5	79	282 000		706 000	

Notes: ⁽¹⁾ Minimum allowable value of chamfer dimensions r₁ and r₂.
⁽²⁾ When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s.
 Remark: No oil hole is provided.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952393223
Innendurchmesser	60 mm
Außendurchmesser	90 mm
Dicke	44 mm
Typ	GE
Schmierung	ohne
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE