


Axial nadellager AZK10019015-IKO - AZK10019015-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/axial-nadellager/azk10019015-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

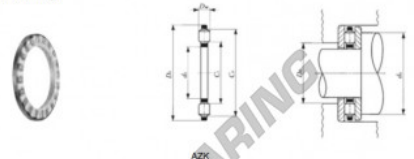

| Shaft dia. mm | Identification number | | | | | | | |
|---------------|-----------------------|---------------|-----------------------|---------------|------------------|------------------|---------------|-------|
| | Thrust roller bearing | Mass (Ref.) g | Thrust roller bearing | Mass (Ref.) g | Inner ring | Outer ring | Mass (Ref.) g | |
| 100 | AZ 10019039 | 5 960 | AZK 10019015 | 2 120 | WS 100190 | GS 100190 | | 1 920 |

| Boundary dimensions mm | | | | | | | | | | Standard mounting dimensions mm | | Basic dynamic load rating C | Basic static load rating C ₀ | Allowable rotational speed ⁽²⁾ |
|------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|---------------------------------|---------------------|-----------------------------|---|---|
| d | D | T | d _c | D _c | D _w | B | r _s (1) | C ₁ | C ₂ | d _s Min. | D _s Max. | N | N | rpm |
| 100 | 190 | 39 | 100.1 | 189.3 | 15 | 12 | 1.5 | 119 | 179 | 177 | 120 | 333 000 | 1 420 000 | 2 000 |

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

| | |
|------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3616060466174 |
| Innendurchmesser | 100 mm |
| Innendurchmesser | 3.937" inch |
| Außendurchmesser | 190 mm |
| Außendurchmesser | 7.48" inch |
| Dicke | 15 mm |
| Dicke | 0.591" inch |
| Gewicht | 2120 g |
| Verpackung | 1 |

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE