


## Axial nadellager AZK15025015-IKO - AZK15025015-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/axial-nadellager/azk15025015-iko>

**IKO**

**THRUST BEARINGS**

Thrust Roller Bearings

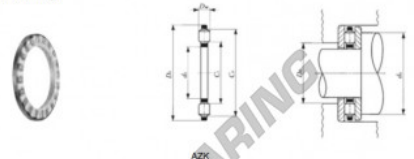

| Shaft dia.<br>mm | Identification number |                  |                       |                  |                  |                  |                  |
|------------------|-----------------------|------------------|-----------------------|------------------|------------------|------------------|------------------|
|                  | Thrust roller bearing | Mass (Ref.)<br>g | Thrust roller bearing | Mass (Ref.)<br>g | Inner ring       | Outer ring       | Mass (Ref.)<br>g |
| 150              | <b>AZ 15025039</b>    | 9 140            | <b>AZK 15025015</b>   | 3 260            | <b>WS 150250</b> | <b>GS 150250</b> | 2 940            |

| Boundary dimensions<br>mm |     |    |                |                |                |    |                    |                |                | Standard mounting<br>dimensions mm |                        | Basic dynamic<br>load rating<br>C | Basic static<br>load rating<br>C <sub>0</sub> | Allowable<br>rotational<br>speed <sup>(*)</sup> |
|---------------------------|-----|----|----------------|----------------|----------------|----|--------------------|----------------|----------------|------------------------------------|------------------------|-----------------------------------|---|---|
| d                         | D   | T  | d <sub>c</sub> | D <sub>c</sub> | D <sub>w</sub> | B  | r <sub>s</sub> (1) | C <sub>1</sub> | C <sub>2</sub> | d <sub>4</sub><br>Min.             | D <sub>4</sub><br>Max. | N                                 | N   | rpm   |
| 150                       | 250 | 39 | 150.1          | 249            | 15             | 12 | 2.1                | 171            | 237            | 236                                | 172                    | 459 000                           | 2 380 000                                     | 1 500   |

Notes: (\*) Minimum allowable value of chamfer dimension r  
(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUKTMERKMALE

|                  |               |
|------------------|---------------|
| Marke            | IKO           |
| N° Ean13         | 3616060466730 |
| Innendurchmesser | 150 mm        |
| Außendurchmesser | 250 mm        |
| Dicke            | 15 mm         |
| Gewicht          | 3260 g        |
| Verpackung       | 1             |

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE