


## Nadelhülsenlager TAM1916-IKO - TAM1916-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/tam1916-iko>

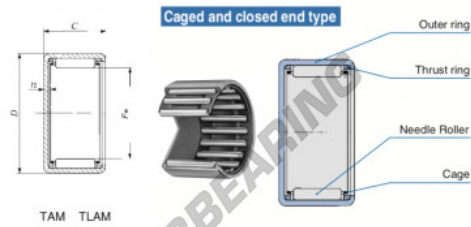

Boundary dimensions			Standard mounting dimensions mm				Basic dynamic	Basic static	Allowable	Assembled
mm			Shaft dia.	Housing bore dia.		load rating	load rating	rotational	inner ring	
$F_w$	$D$	$C$	$r_2$	$r_1$	$M_1$	$C$	$C_0$	speed(n)		
			Max.	Min.	Max.	Min.	H	K	rpm	
19	27	16	1.3	19.000	18.987	27.012	26.991	—	—	
								12200	15700	
								20000	RT 1916-1	

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599049
Innendurchmesser	19 mm
Außendurchmesser	27 mm
Dicke	16 mm
Grenzdrehzahl	20000 rpm
Dynamische Belastung	12.2 kN
Statische Belastung	15.7 kN
Verpackung	1

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE