


Nadelhülsenlager TAM2225-IKO - TAM2225-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/tam2225-iko>

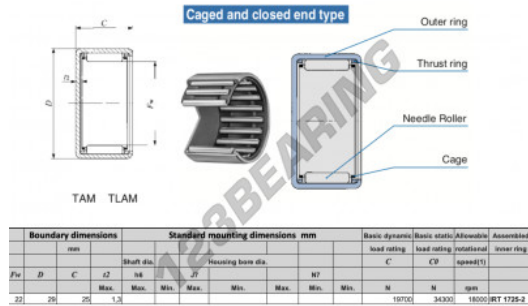

| Boundary dimensions | | | Standard mounting dimensions mm | | | | | | | | Basic dynamic load rating | | Basic static load rating | | Allowable speed | | Assembled inner ring |
|---------------------|----|----|---------------------------------|-----|-------------------|------|------|------|------|------|---------------------------|-------|--------------------------|-------|-----------------|--------|----------------------|
| mm | | | Shaft dia. | | Housing bore dia. | | | | H7 | | C | | CP | | rpm | | Outer ring |
| File | D | C | d2 | h4 | d7 | Min. | Max. | Min. | Max. | Min. | Max. | N | N | rpm | | | |
| | 22 | 25 | 25 | 1.3 | | | | | | | | 10700 | 34300 | 18000 | RET | 1725-2 | |

PRODUKTMERKMALE

| | |
|----------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3616060599186 |
| Innendurchmesser | 22 mm |
| Außendurchmesser | 29 mm |
| Dicke | 25 mm |
| Grenzdrehzahl | 18000 rpm |
| Dynamische Belastung | 19.7 kN |
| Statische Belastung | 34.3 kN |
| Verpackung | 1 |

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE