


Nadelhülsenlager TAM2920-IKO - TAM2920-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/tam2920-iko>

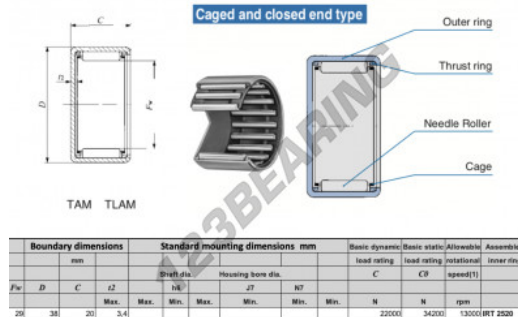

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)	Assembled inner ring
mm		Shaft dia.		Housing bore dia.				C	CP	rpm			
P ₀	D	C	22	H6	H7	H7	H7	N	N	rpm			
29	38	20	3,4					22000	34200	13000 RT 2520			

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599452
Innendurchmesser	29 mm
Außendurchmesser	38 mm
Dicke	20 mm
Grenzdrehzahl	13000 rpm
Dynamische Belastung	22 kN
Statische Belastung	34.2 kN
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE