


Nadelhülsenlager TAM6030-IKO - TAM6030-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/tam6030-iko>

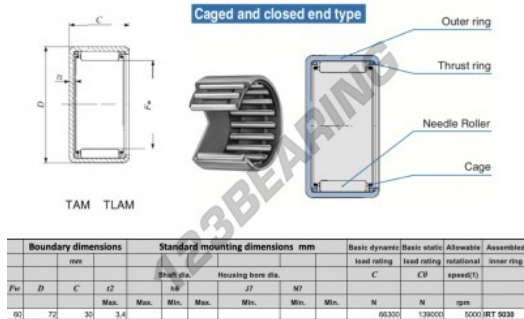

Boundary dimensions			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)		Assembled inner ring
mm			mm				C		C ₀		rpm		
P ₀₄	D	C	T	Shaft dia.		Housing bore dia.		N	N	rpm			
				Max.	Min.	Max.	Min.	Min.	Min.				
60	72	30	3,4					66300	139000	5000		RT 9030	

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599940
Innendurchmesser	60 mm
Innendurchmesser	2.362" inch
Außendurchmesser	72 mm
Außendurchmesser	2.835" inch
Dicke	30 mm
Dicke	1.181" inch
Grenzdrehzahl	5000 rpm
Dynamische Belastung	66.3 kN
Statische Belastung	139 kN
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE