


Nadelhülsenlager BAM348-IKO - BAM348-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/bam348-iko>

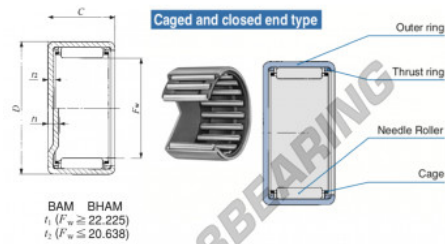

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic load rating	Basic static load rating	Minimum rotational speed	Maximum rotational speed
D	C	B	Shoulder dia.	Housing bore dia.	JT	C'	C''	rpm	rpm
53.975 (2.12)	63.500 (2.50)	12.700 (0.500)	Min.	Min.	Min.	Min.	Min.	5500	3000

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060600967
Innendurchmesser	53.975 mm
Innendurchmesser	2 1/8" inch
Außendurchmesser	63.5 mm
Außendurchmesser	2 1/2" inch
Dicke	12.7 mm
Dicke	1/2" inch
Grenzdrehzahl	5500 rpm
Dynamische Belastung	16.1 kN
Statische Belastung	26.6 kN
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE