


## Nadelhülsenlager BAM4416-IKO - BAM4416-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/bam4416-iko>

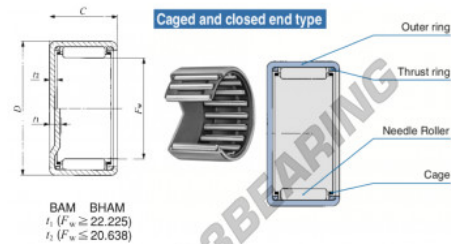

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Minimum oil lubrication speed (rpm)	Maximum speed (rpm)
Pr	D	C	t		J	J1	C	CF	n	n1
			Max.	Min.						
04416 (2.44)	79.375 (3.12)	25.4 (1.000)	2.8	69.85	69.85	79.375 (3.12)	43500	104000	3000	4116

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601063
Innendurchmesser	69.85 mm
Innendurchmesser	2 3/4" inch
Außendurchmesser	79.375 mm
Außendurchmesser	3 1/8" inch
Dicke	25.4 mm
Dicke	1" inch
Grenzdrehzahl	3500 rpm
Dynamische Belastung	43.5 kN
Statische Belastung	104 kN
Verpackung	1

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE