


## Nadelhülsenlager BA1816-Z-IKO - BA1816-Z-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1816-z-iko>

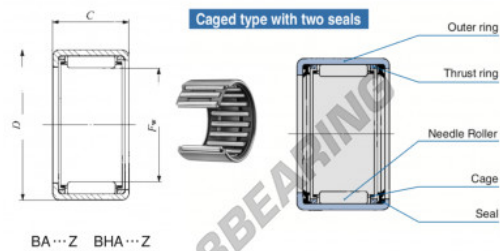

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable assembled	
$F_w$	$D$	$C$	$d_2$	$H_0$	Housing bore dia. $J_0$		$C$	$C_0$	rotational speed (r/min)	inner ring	outer ring	
Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm			
28.575 (1.1243)	34.925 (1.375)	25.40 (1.000)	2.8				20500	40300	13000	RB 1418		

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601278
Innendurchmesser	28.575 mm
Innendurchmesser	1 1/8" inch
Außendurchmesser	34.925 mm
Außendurchmesser	1 3/8" inch
Dicke	25.4 mm
Dicke	1" inch
Grenzdrehzahl	13000 rpm
Dynamische Belastung	20.5 kN
Statische Belastung	40.3 kN
Verpackung	1

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE