


Nadelhülsenlager BA4216-Z-IKO - BA4216-Z-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/ba4216-z-iko>

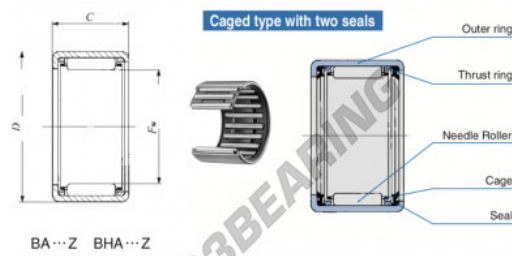

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ¹⁾	Assembled inner ring	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h_d</i>	Housing bore dia.	<i>C</i>	<i>C₀</i>	rpm		
			Max.	Max.	Min.	Max.	Min.	N	N	
66.675 (2 5/8)	76.200 (3)	25.400 (1.000)	2.0	66.675 (2.625)	66.400 (2.610)	75.210 (2.961)	75.180 (2.959)	4200	87600	4000 MB 3616

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601643
Innendurchmesser	66.675 mm
Außendurchmesser	76.2 mm
Dicke	25.4 mm
Grenzdrehzahl	4000 rpm
Dynamische Belastung	42 kN
Statische Belastung	97.9 kN
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE