


## Nadelhülsenlager BA105-Z-IKO - BA105-Z-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/ba105-z-iko>

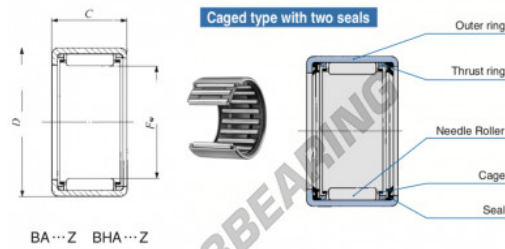

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable relative speed	Assembled inner ring
$F_w$	$D$	$C$	$z$	$h$	$JT$	$C$	$C_0$	rpm	
15.875 (5/8)	20.638 (13/16)	7.92 (.312)	1.3			2870	3220	25000	-

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060602947
Innendurchmesser	15.875 mm
Innendurchmesser	5/8" inch
Außendurchmesser	20.638 mm
Außendurchmesser	13/16" inch
Dicke	7.92 mm
Dicke	0.312" inch
Grenzdrehzahl	25000 rpm
Dynamische Belastung	2.87 kN
Statische Belastung	3.22 kN
Verpackung	1

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE