


# Nadelhülsenlager BA1012-Z-IKO - BA1012-Z-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1012-z-iko>

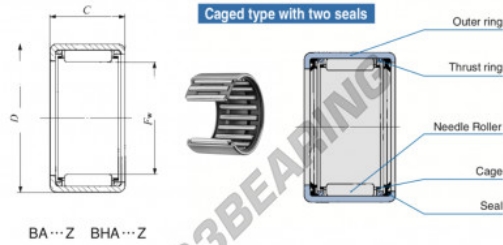

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring	
$F_w$	$D$	$C$	$d_2$	$h_6$	Housing bore dia.	$C$	$C_0$	rpm	inner ring	
15.875 (5/8)	20.638 (81/64)	19.05 (750)	1.3	15.875 (5/8)	19.264	20.625 (81/64)	20.625	9000	14100	25000 (RB 612-1)

## PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060602978
Innendurchmesser	15.875 mm
Außendurchmesser	20.638 mm
Dicke	19.05 mm
Grenzdrehzahl	25000 rpm
Dynamische Belastung	9.02 kN
Statische Belastung	14.1 kN
Verpackung	1

[kontakt@123kugellager.de](mailto:kontakt@123kugellager.de)

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE