


Nadelhülsenlager BA1112-Z-IKO - BA1112-Z-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1112-z-iko>

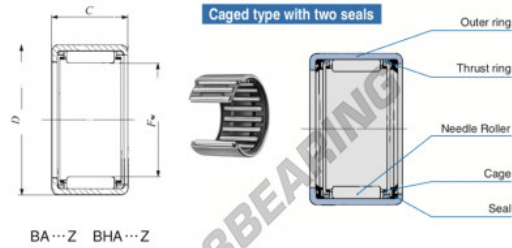

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(r) | Assembled inner ring |
|------------------------------|----------------|---------------|---------------------------------|--------|--------|----------------|---------------------------|--------------------------|-------------------------------|----------------------|
| F_w | D | C | d | d_f | d_f | C | CW | | | |
| | Min. | Min. | Min. | Min. | Max. | Min. | N | N | rpm | |
| 17.462 (0.687) | 22.225 (0.875) | 19.05 (0.750) | 1.5 | 17.462 | 17.451 | 22.237 (0.876) | 10200 | 17000 | 25000 | IPB 812 |

PRODUKTMERKMALE

| | |
|----------------------|---------------|
| Marke | IKO |
| N° Ean13 | 3616060603142 |
| Innendurchmesser | 17.462 mm |
| Außendurchmesser | 22.225 mm |
| Dicke | 19.05 mm |
| Grenzdrehzahl | 25000 rpm |
| Dynamische Belastung | 10.2 kN |
| Statische Belastung | 17 kN |
| Verpackung | 1 |

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE