


Axial nadellager
AZ11016040-IKO - AZ11016040-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/axial-nadellager/az11016040-iko>

IKO
THRUST BEARINGS
Thrust Roller Bearings

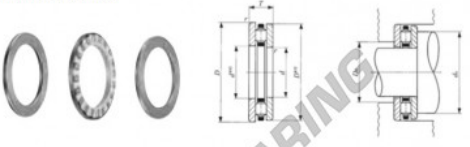

Identification number

Shaft dia. mm	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
110	AZ 11016040	3 220	AZK 11016017	1 320	WS 110160	GS 110160	950

Boundary dimensions mm

d	D	T	d_c	D_c	D_w	B	r_{smax} (°)	C_0	d_a Min.	D_a Max.	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (°) rpm
110	160	40	110.1	159.5	17	11.5	1.1	120	154	153	282 000	1 030 000	2 000

Notes: (°) Minimum allowable value of chamfer dimension r
(°) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060466440
Innendurchmesser	110 mm
Außendurchmesser	160 mm
Dicke	40 mm
Gewicht	3220 g
Verpackung	1

kontakt@123kugellager.de
0800 001 076 6
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE