Nadellager
RNA69-32-U-IKO - RNA69-32-U-IKO

https://www.123kugellager.de/kugellager-gehauselager/nadellager/radial/rna69-32-u-iko

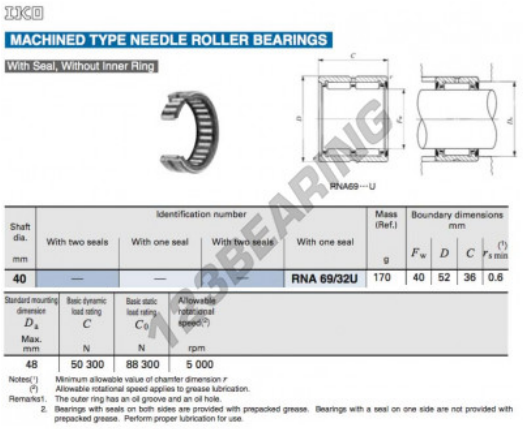

IKO

MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring

RNA69···U

Shaft dia. mm	Identification number: With two seals	With one seal	With two seals	With one seal	Mass (Ref.) g	Boundary dimensions mm: F_w	D	C	r_s min (1)
40	—	—	—	RNA 69/32U	170	40	52	36	0.6

Standard mounting dimension D_a Max. mm	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed (2) rpm
48	50 300	88 300	5 000

Notes(1) Minimum allowable value of chamfer dimension r

(2) Allowable rotational speed applies to grease lubrication.

Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

123BEARING

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952379159
Innendurchmesser	40 mm
Außendurchmesser	52 mm
Dicke	36 mm
Verpackung	1

kontakt@123kugellager.de
0800 001 076 6
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE