


Axial nadellager AZ557816-IKO - AZ557816-IKO

<https://www.123kugellager.de/kugellager-gehauselager/nadellager/axial-nadellager/az557816-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

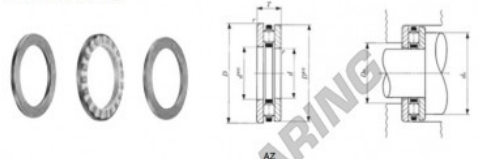

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
55	AZ 557816	275	AZK 55786	89	WS 5578	GS 5578	93	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ^(*)
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
55	78	16	55.05	77.5	6	5	0.6	59	75	75	80	51 700	192 000	4 500

Notes: ^(*) Minimum allowable value of chamfer dimension r
⁽¹⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060466006
Innendurchmesser	55 mm
Außendurchmesser	78 mm
Dicke	16 mm
Gewicht	275 g
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE