


Winkelgelenke SA

BRM06-00-502-DURBAL - BRM06-00-502-DURBAL

<https://www.123kugellager.de/kugellager-gehauselager/gelenkkopfe-gelenklager/sa/brm06-00-502-durbal>

BRM06-00-502

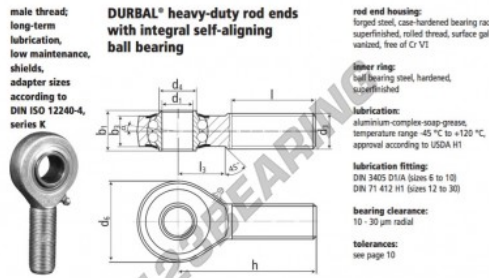

male thread:
long-term
lubrication,
low maintenance,
shields,
adapter sizes
according to
DIN ISO 12240-4,
series K

**DURBAL® heavy-duty rod ends
with integral self-aligning
ball bearing**

rod end housing:
forged steel, case-hardened bearing race,
superfinished, rolled thread, surface gal-
vanized, free of Cr-VI

inner ring:
self-bearing steel, hardened,
superfinished

lubrication:
aluminum-complex-soap-grease,
temperature range -45 °C to +120 °C,
approval according to USDA H1

lubrication fitting:
DIN 2455 D11A (sizes 6 to 10)
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:
10 - 30 µm radial

tolerances:
see page 10

order number		measurements [mm]									
Type	right-hand thread	left-hand thread	d ₁	d ₂	d ₃	d ₄	d ₅	b ₁	b ₂	h	
BRM 06 -00		-502	6	M 6		9,0	20	9	6,75	36	
measurements [mm]			weight		calculation-factors		rotational speed limit		basic load rating		
Type	l	l ₂	α [°]	[kg]	Y	v ₀	lim. C [N]	dyn. C ₁₀ [N]	stat. C ₀ [N]		
BRM 06	22	12	8,0	0,019	2,09	2,19	1350	2750	650		

PRODUKTMERKMALE

Marke	DURBAL
N° Ean13	3663952506937
Innendurchmesser	6 mm
Außendurchmesser	20 mm
Dicke	9 mm
Typ	SA
Gewicht	19 g
Gewinde	Linksgewinde
Schmierung	mit
Verpackung	1

kontakt@123kugellager.de

0800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE